
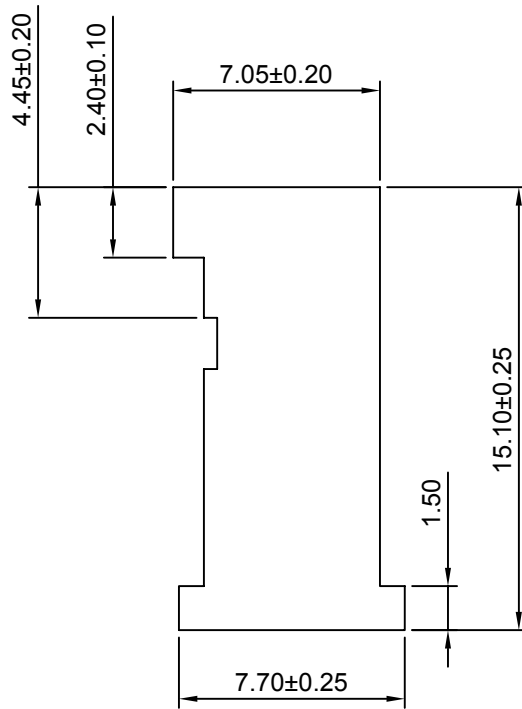
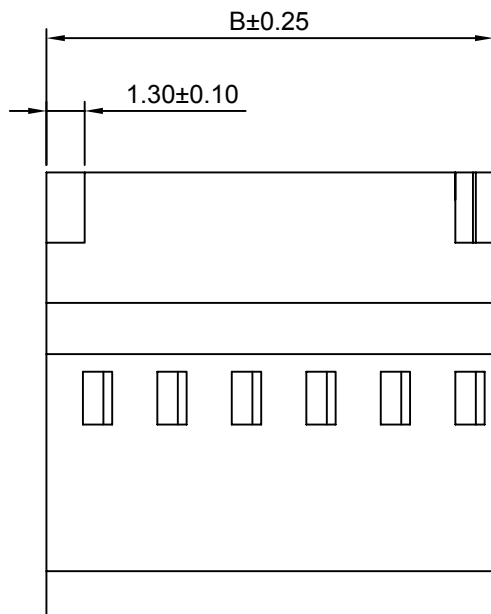


**Ordering Information:**

A2549HB-2xXP - \*\*

- 1      2
1. Part No.  
2. Color:  
(blank): Blue  
BK: Black

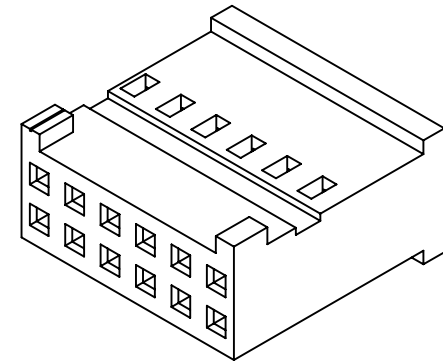

**SPECIFICATIONS:**

Current Rating: 3A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1000V AC/minute  
Material: Nylon 66+15%GF, UL94V-0

**Ordering Information & Dimensions**

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	5.08	2x8P	17.78	20.32
2x3P	5.08	7.62	2x9P	20.32	22.86
2x4P	7.62	10.16	2x10P	22.86	25.40
2x5P	10.16	12.70	2x12P	27.94	30.48
2x6P	12.70	15.24	2x15P	35.56	38.10
2x7P	15.24	17.78	2x18P	43.18	45.72



CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Title :  
**2.54mm PITCH**  
**Dual Row Housing**

Draw BY:	Approved :
Moore	GONGYB

General Tolerance

x.xx±0.25	ANGLE±
x.xxx±0.20	
x.xxxx±0.15	

DRAW NO : **A2549HB-2xXP**      REV **A0**

A0	NEW RELEASE	2011.05.13
REV	DESCRIPTION	DATE