

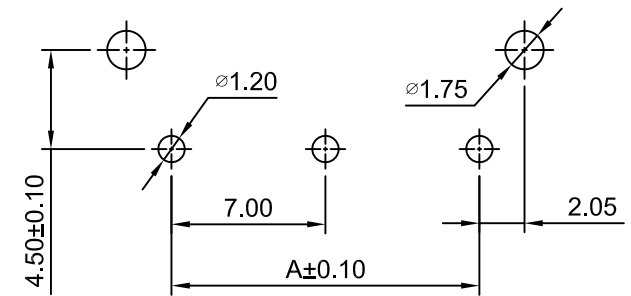


Ordering Information:  
 A3502WR-XP-A - \*\*\* - \*\* - \*\*  
 1 2 3 4

- Part NO.
- Material:  
 (blank): PBT+15%GF,UL94V-0 (White)  
 GWT: Nylon 66,UL94V-0(Beige),  
 IEC 60335-1,5th Edition  
 Glow Wire Capable.
- Color:  
 BK:Black RD:Red  
 YL:Yellow BL:Blue  
 GN:Green PK:Pink
- Finish:  
 (blank):Matte Tin over Nickel  
 G:Gold over Nickel

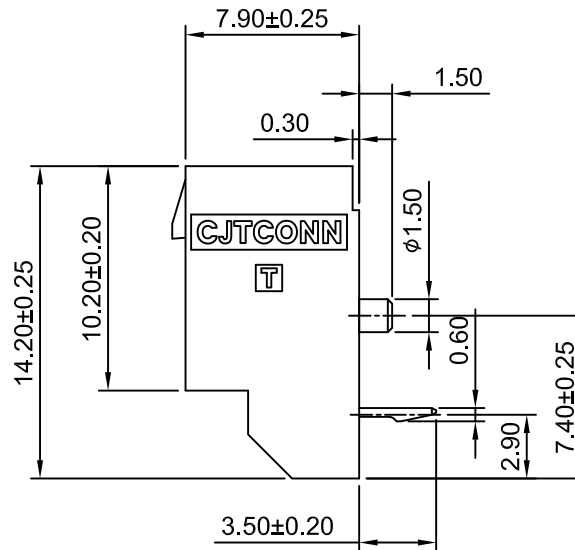

P.C.B LAYOUT  
 TOLERANCE:±0.05

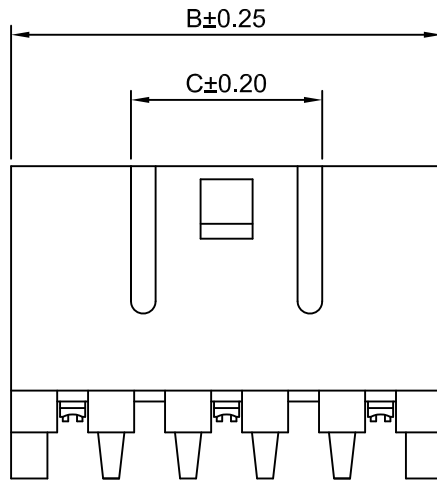

SPECIFICATIONS:

Current Rating: 5.5A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass  
 Material: PBT+15%GF,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A3502WR-3P-A	7.00	12.60	6.10
A3502WR-5P-A	14.00	19.60	8.70
A3502WR-7P-A	21.00	26.60	8.70
A3502WR-9P-A	28.00	33.60	8.70
A3502WR-11P-A	35.00	40.60	8.70
A3502WR-13P-A	42.00	47.60	8.70
A3502WR-15P-A	49.00	54.60	8.70

**CJTconn** CHANGJIANG CONNECTORS CO.,LTD.

Unit mm	Scale 3:1	Sheet 1 of 1	TITLE 3.50mm PITCH 90° WAFER	
DRWN Dengchun Yi	CHK'D Dlankul Wan	APPR Jack Yin	DRAWING NO. A3502WR-XP-A	
General Tolerances		THIRD ANGLE PROJECTION	REV A1	
A1	CHANGE THE DRAWING	2020.08.13	x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°	
A0	NEW RELEASE	2005.05.10		
REV	DESCRIPTION	DATE		