



Ordering Information:

C3962F-GP-H - ***
1 2

1.Part NO.

2.Finish

- (blank): Gold over Nickel,
1μin (0.025μm) MIN.Select Gold,mating area,
80~120μin (2.03μm~3.05μm) MIN.Select Tin,other area,
30~50μin (0.76μm~1.27μm) MIN.Select Nickel,all area.
- G15: 15μin (0.38μm) MIN.Select Gold,mating area,
80~120μin (2.03μm~3.05μm) MIN.Select Tin,other area,
30~50μin (0.76μm~1.27μm) MIN.Select Nickel,all area.
- G30: 30μin (0.76μm) MIN.Select Gold,mating area,
80~120μin (2.03μm~3.05μm) MIN.Select Tin,other area,
30~50μin (0.76μm~1.27μm) MIN.Select Nickel,all area.

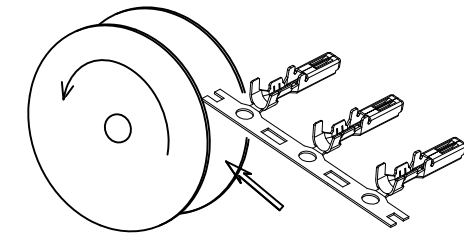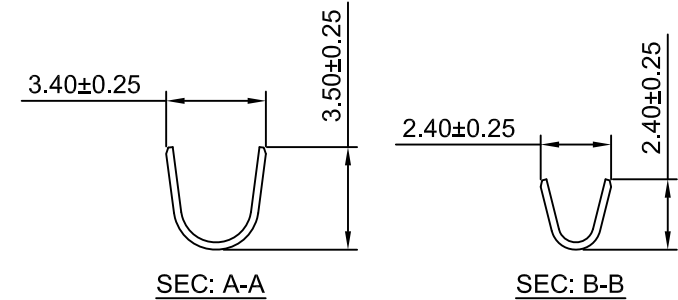

WINDING DIRECTION

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
C3962F-TP-H	AWG#18-#22	2.10mm(max)	Phosphor Bronze	Tin over Nickel	8,000 PCS
C3962F-GP-H	AWG#18-#22	2.10mm(max)	Phosphor Bronze	Gold over Nickel	8,000 PCS

A0	NEW RELEASE	2020.07.14
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE
Unit mm	Scale 4:1	Sheet 1 of 1	3.96mm PITCH CRIMP TERMINAL
DRWN Dengchun Yi	CHK'D Dlankul Wan	APPR Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx± 0.25 x.xxx± 0.20 x.xxxx± 0.15 ANGLES $\pm 1^\circ$			C3962F-T-H
			REV A0